



Premier™ Line Systems

With EASNet™ Management & Analysis

Securing Today for a Profitable Tomorrow



Premier Line is a family of feature rich Electronic Article Surveillance systems compatible with all 58Khz acousto-magnetic tags and labels.


Premier Line's clear acrylic composition provides a very stylish appearance that accommodates the needs of fashionable retailers. And their slim design results in an aesthetically pleasing streamline appearance.

A single controller facilitates the integration of up to four pedestals to protect a variety of exit sizes, with each pedestal up to 30 meters away. Optional EASNet provides a convenient and powerful software interface (LAN and Internet) for a variety of controls and data mining features.

Premier Line Systems
High-Fashion design
and acrylic composition
for a most stylish
appearance.

**Fully compatible with
all acousto-magnetic
tags and labels.**

CONNECT UP TO FOUR TRANSCEIVERS TO A SINGLE CONTROLLER !

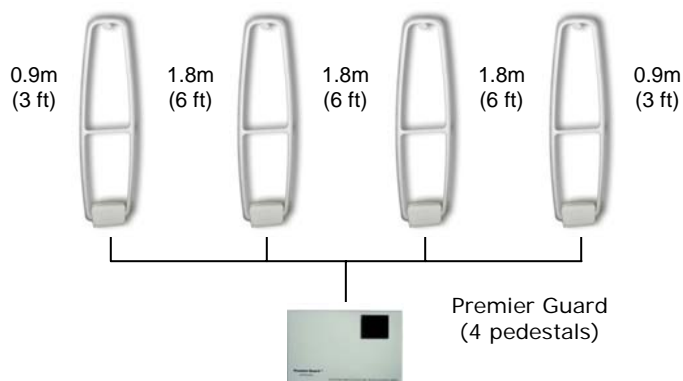

Premier Line Control Unit (PLCU)

This compact unit manages up to 4 transceivers and is fully compatible with EASNet software. Flexible architecture supports a variety of entrances sizes from a single controller.

Digital Signal Processing Technology

All operations of the WG Controller are driven by the most technologically advanced Digital Signal Processors. It features automated adjustments by processor software, plus manual adjustments can be optionally performed with a handheld remote, and via LAN or Internet.

One Size Does Not Fit All

Recognizing that one design will not satisfy every location, WG developed the Premier Line with three different transceivers to satisfy a variety of applications needs.

- ◆ **Premier Guard** is our base system that will detect tags up to 0.9m (3 ft) on either side of the pedestal.
- ◆ **Premier Door Guard** is designed for mounting off the floor and onto the door frame.
- ◆ **Premier Pro** extends entrance coverage up to 1.4m (4.5 ft) on either side of the pedestal.

Need Just a Bit More Coverage?

Where slightly extended coverage is required, WG offers the cost-effective **Turbo Antenna**. This will add up to 0.9m (3 ft) of coverage to either side of the pedestal.

Features

- ◆ High End, Sophisticated, Attractive.
- ◆ Great detection range.
- ◆ LAN port for remote access.
- ◆ Optional External Alarm with Audio.
- ◆ Patented noise cancellation technology.



Detection Distances on Either Side of Pedestal


Premier Guard	0.9m (3 ft)
Premier Pro	1.4m (4.5 ft)
Premier Door Guard	0.9m (3 ft)

Note: Detection distances are based on Micro Pencil Tag.

Detection Distance with Turbo Antennas Installed

Premier Guard	1.8m (6 ft)
Premier Pro	2.3m (7.5 ft)
Premier Door Guard	1.8m (6 ft)

Example Configuration
Premier Pro with Turbo Antennas

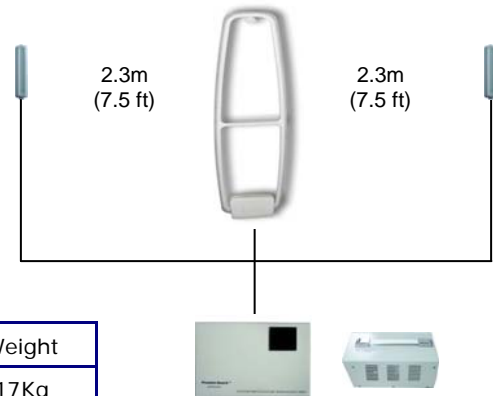

	Length	Width	Depth	Weight
Premier Guard	1524mm 60"	375mm 14.8"	24mm 1"	17Kg 37.5 lb
Premier Pro	1500mm 59"	710mm 28"	24mm 1"	(TBD)
Premier Door Guard	1530mm 60.2"	270mm 10.6"	24mm 1"	(TBD)
Turbo Antenna	250mm 9.8"	54mm 2"	42mm 1.6"	(TBD)
Controller	314mm 12.4"	193mm 7.6"	82mm 3.2"	3.5Kg 7.7 lb
Power Supply	225mm 8.8"	143mm 5.6"	103mm 4"	3Kg 6.6 lb

General Specifications

	Europe	USA
Operating Frequency	58Khz	58Khz
Power (Pedestals)	24vac	24vac
Power (Turbo Antenna)	24vac	24vac
Power (Controller)	24vac	24vac
Power Transformer	200-220vac	110vac
Operating Temperature	0° to 49°C	32° to 120°F

Ordering Information

Premier Guard	WGPGTR58
Premier Pro	WGPPTTR58
Premier Door Guard	WGPDG58
Turbo Antenna	WGTA58-NC
PLCU	WGPLCU58
Power Supply	WGPS2490



Vitag Security Solutions Ltd
 29i Sir William Ave, East Tamaki
 P.O Box 259-193 Greenmount
 Auckland
 info@vitag.co.nz
 Tel. 0800 736-352